



DIN 125 A

Normale onderlegging

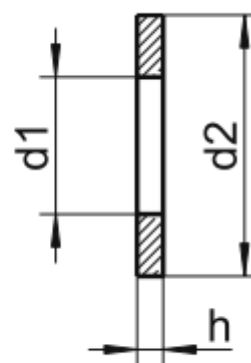

d1	Voor	d2	h
1,7	M1,6	4,0	0,3
2,2	M2	5,0	0,3
2,7	M2,5	6,0	0,5
3,2	M3	7,0	0,5
4,3	M4	9,0	0,8

